


Настройка экрана терминала

В меню терминала выберите **Настройки – Экран**.

Для изменения яркости экрана переместите ползунок **Яркость экрана**.

Для включения или выключения автоматической регулировки яркости экрана переместите переключатель **Автоматическая яркость** в положение **Вкл.** Если включена автоматическая регулировка яркости экрана, то яркость экрана будет меняться автоматически в зависимости внешнего освещения.

Для изменения заставки экрана выберите из выпадающего списка вариант заставки: **Градиент**, **Анимированная** или **Однотонная**.

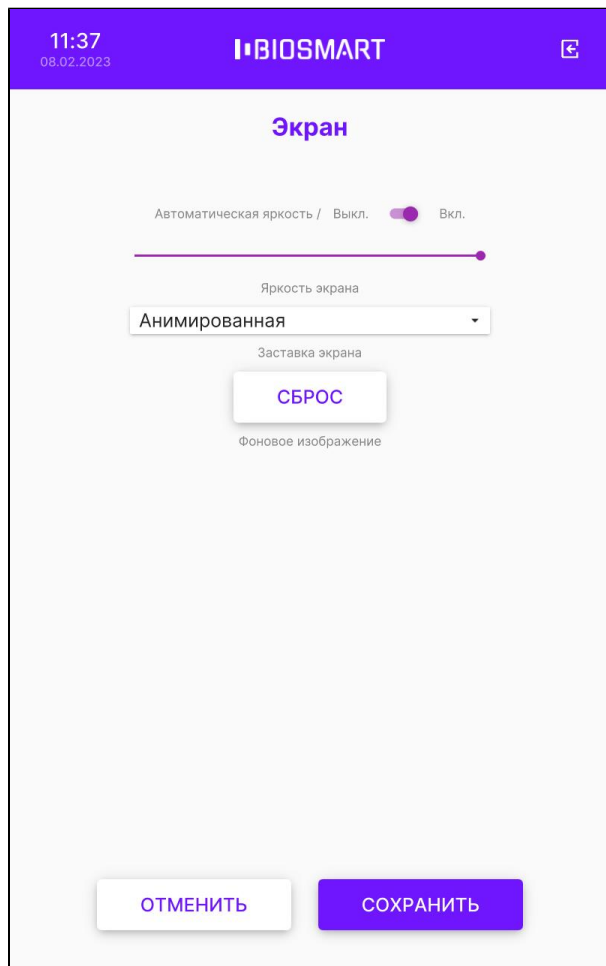

The screenshot shows the 'Экран' (Screen) settings menu in the BIOSMART terminal. At the top, there is a status bar with the time '11:37', the date '08.02.2023', the BIOSMART logo, and a refresh icon. The main title 'Экран' is centered. Below it, there is a toggle switch for 'Автоматическая яркость' (Automatic brightness), which is currently turned off. A horizontal slider for 'Яркость экрана' (Screen brightness) is positioned below the toggle. Underneath the slider is a dropdown menu for 'Заставка экрана' (Screen saver), which is currently set to 'Анимированная' (Animated). Below the dropdown is a 'СБРОС' (Reset) button. At the bottom of the screen, there are two buttons: 'ОТМЕНИТЬ' (Cancel) and 'СОХРАНИТЬ' (Save).

Нажмите **СОХРАНИТЬ**.